


KOMATSU

LW 100-1E

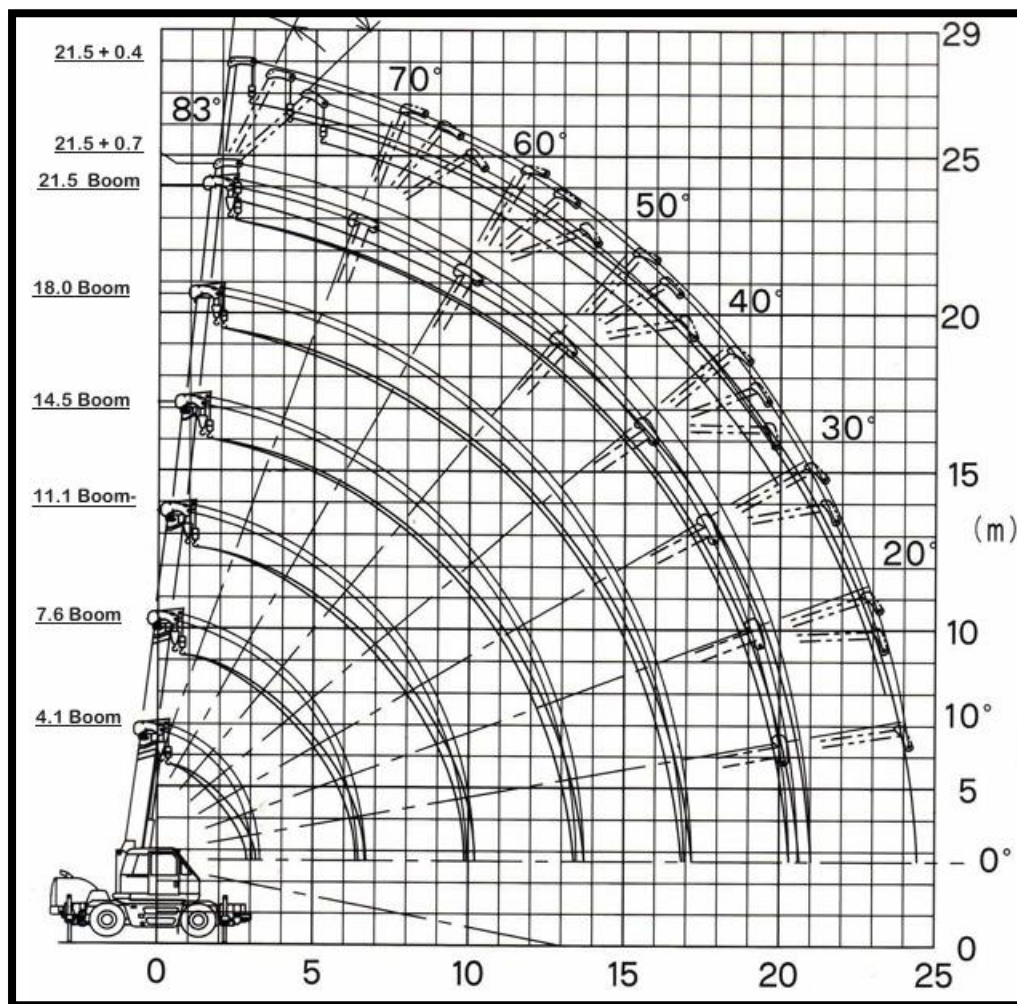

KOMATSU

LW 100 Rated Capacity Table

Working Radius (m)	OUTRIGERS FULLY EXTENDED (4.75m)					
	4.1 Boom	7.6 Boom	11.11 Boom	14.5 Boom	18.0 Boom	21.5 Boom
1.0	10.00	5.00				
1.5	10.00	5.00	5.00			
2.0	10.00	5.00	5.00	4.00		
2.5	10.00	5.00	5.00	4.00	4.00	
3.0	8.00	5.00	5.00	4.00	4.00	2.30
3.5		5.00	5.00	4.00	4.00	2.30
4.0		5.00	5.00	4.00	4.00	2.30
4.5		5.00	4.55	4.00	3.70	2.30
5.0		4.60	4.10	3.70	3.40	2.30
5.5		4.15	3.50	3.40	3.10	2.30
6.0		3.70	3.15	3.15	2.85	2.30
6.5		3.35(6.4)	2.95	2.90	2.60	2.15
7.0			2.80	2.65	2.40	2.00
8.0			2.30	2.25	2.05	1.75
9.0			1.90	1.95	1.80	1.55
10.0			1.57(9.9m)	1.70	1.60	1.40
11.0				1.45	1.40	1.25
12.0				1.20	1.25	1.15
13.0				1.00	1.05	1.05
14.0				0.92(13.4m)	0.90	0.95
15.0					0.79	0.85
16.0					0.65	0.73
17.0					0.56(16.8m)	0.60
18.0						0.50
19.0						0.42
20.0						0.35
21.0						0.33(20.3m)
Critical	-	-	-	-	-	-
Boom Angle	-	-	-	-	-	-

